


E70RA-I-MW1530-CA 4 Lane MIPI Interface

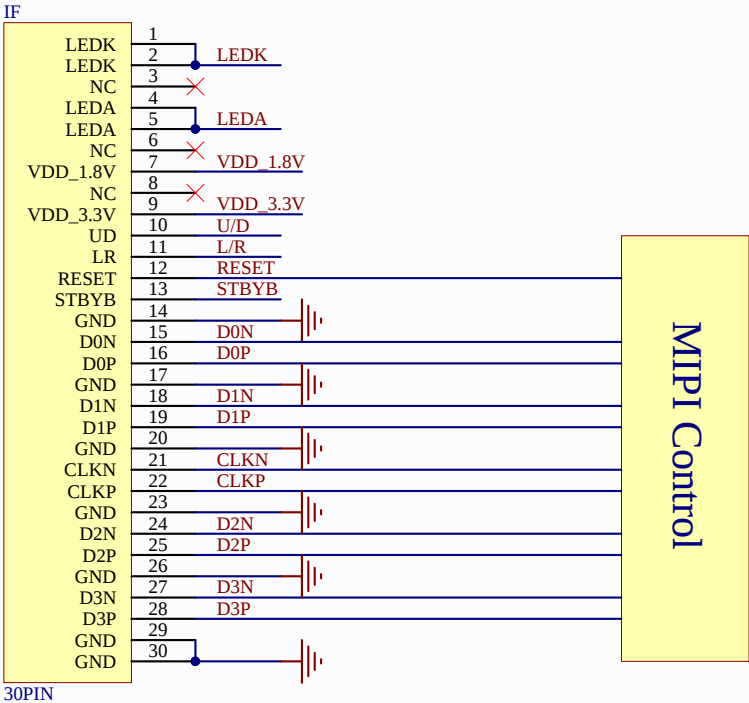

STBYB:
Standby mode, Normally pulled high
STBYB = "1", normal operation
STBYB = "0", timing controller, source driver will turn off, all output are High-Z.

Note 1:
When L/R="0", set right to left scan direction.
When L/R="1", set left to right scan direction.
When U/D="0", set top to bottom scan direction.
When U/D="1", set bottom to top scan direction.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FOCUS DISPLAY SOLUTIONS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSIONS OF FOCUS DISPLAY SOLUTIONS, INC. IS PROHIBITED	Model Name:E70RA-I-MW1530-CA		 FOCUS LCDs LCDs MADE SIMPLE®			
	General Tol: ± 0.2					
	Approvals	Date	Drawing No.:		Scale:	
	DWN:					
	CHK:		Size:		Unit: mm	Page: 1/1
	APP:					