



FOCUS LCDs

LCDs MADE SIMPLE®

Ph. 480-503-4295 | NOPP@FocusLCDs.com

TFT | OLED | CHARACTER | GRAPHIC | UWVD | SEGMENT | CUSTOM

TFT Display Module

Part Number

E70GG-I-RW680-C

Overview:

- 7-inch TFT (165.9x101.0mm)
- 1024x600 Pixels
- 24-Bit RGB Interface
- Wide Temperature Range
- All Viewing Angle
- IPS, Transmissive
- Capacitive Touch Panel
- 680 NITS
- TFT IC: EK79001H/EK73215
- RoHS Compliant

Description

This is a color active matrix TFT (Thin Film Transistor) LCD (Liquid Crystal Display) that uses amorphous silicon TFT as a switching device. This model is composed of a transmissive type TFT-LCD Panel, driver circuit, capacitive touch panel and backlight unit. The resolution of the 7.0" TFT-LCD contains 1024x600 pixels and can display up to 16.7M colors.

Features

Input Voltage: 3.3V

TFT Interface: 24-Bit RGB


CTP Interface: I2C

General Information Items	Specification	Unit	Note
	Main Panel		
TFT Display Area (AA)	154.2(H) x 85.92(V) (7.0 inch)	mm	--
CTP View Area	154.7(H) x 86.63(V)	mm	--
Driver Element	TFT active matrix	--	--
Display Colors	16.7M	colors	--
Number of Pixels	1024(RGB)x600	dots	--
TFT Pixel Arrangement	RGB vertical stripe	--	--
Viewing Angle	ALL	o'clock	--
TFT Controller IC	EK79001H/EK73215	--	--
CTP Driver IC	FT5426-003	--	--
Display Mode	IPS, Transmissive/Normally Black	--	--
Touch Points	5-point and Gestures	--	--
Operating Temperature	-20 to +70	°C	--
Storage Temperature	-30 to +80	°C	--

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	--	165.9	--	mm	--
	Vertical (V)	--	101.0	--	mm	--
	Depth (D)	--	5.525	--	mm	--
Weight		--	TBD	--	g	--

1. Outline Dimensions

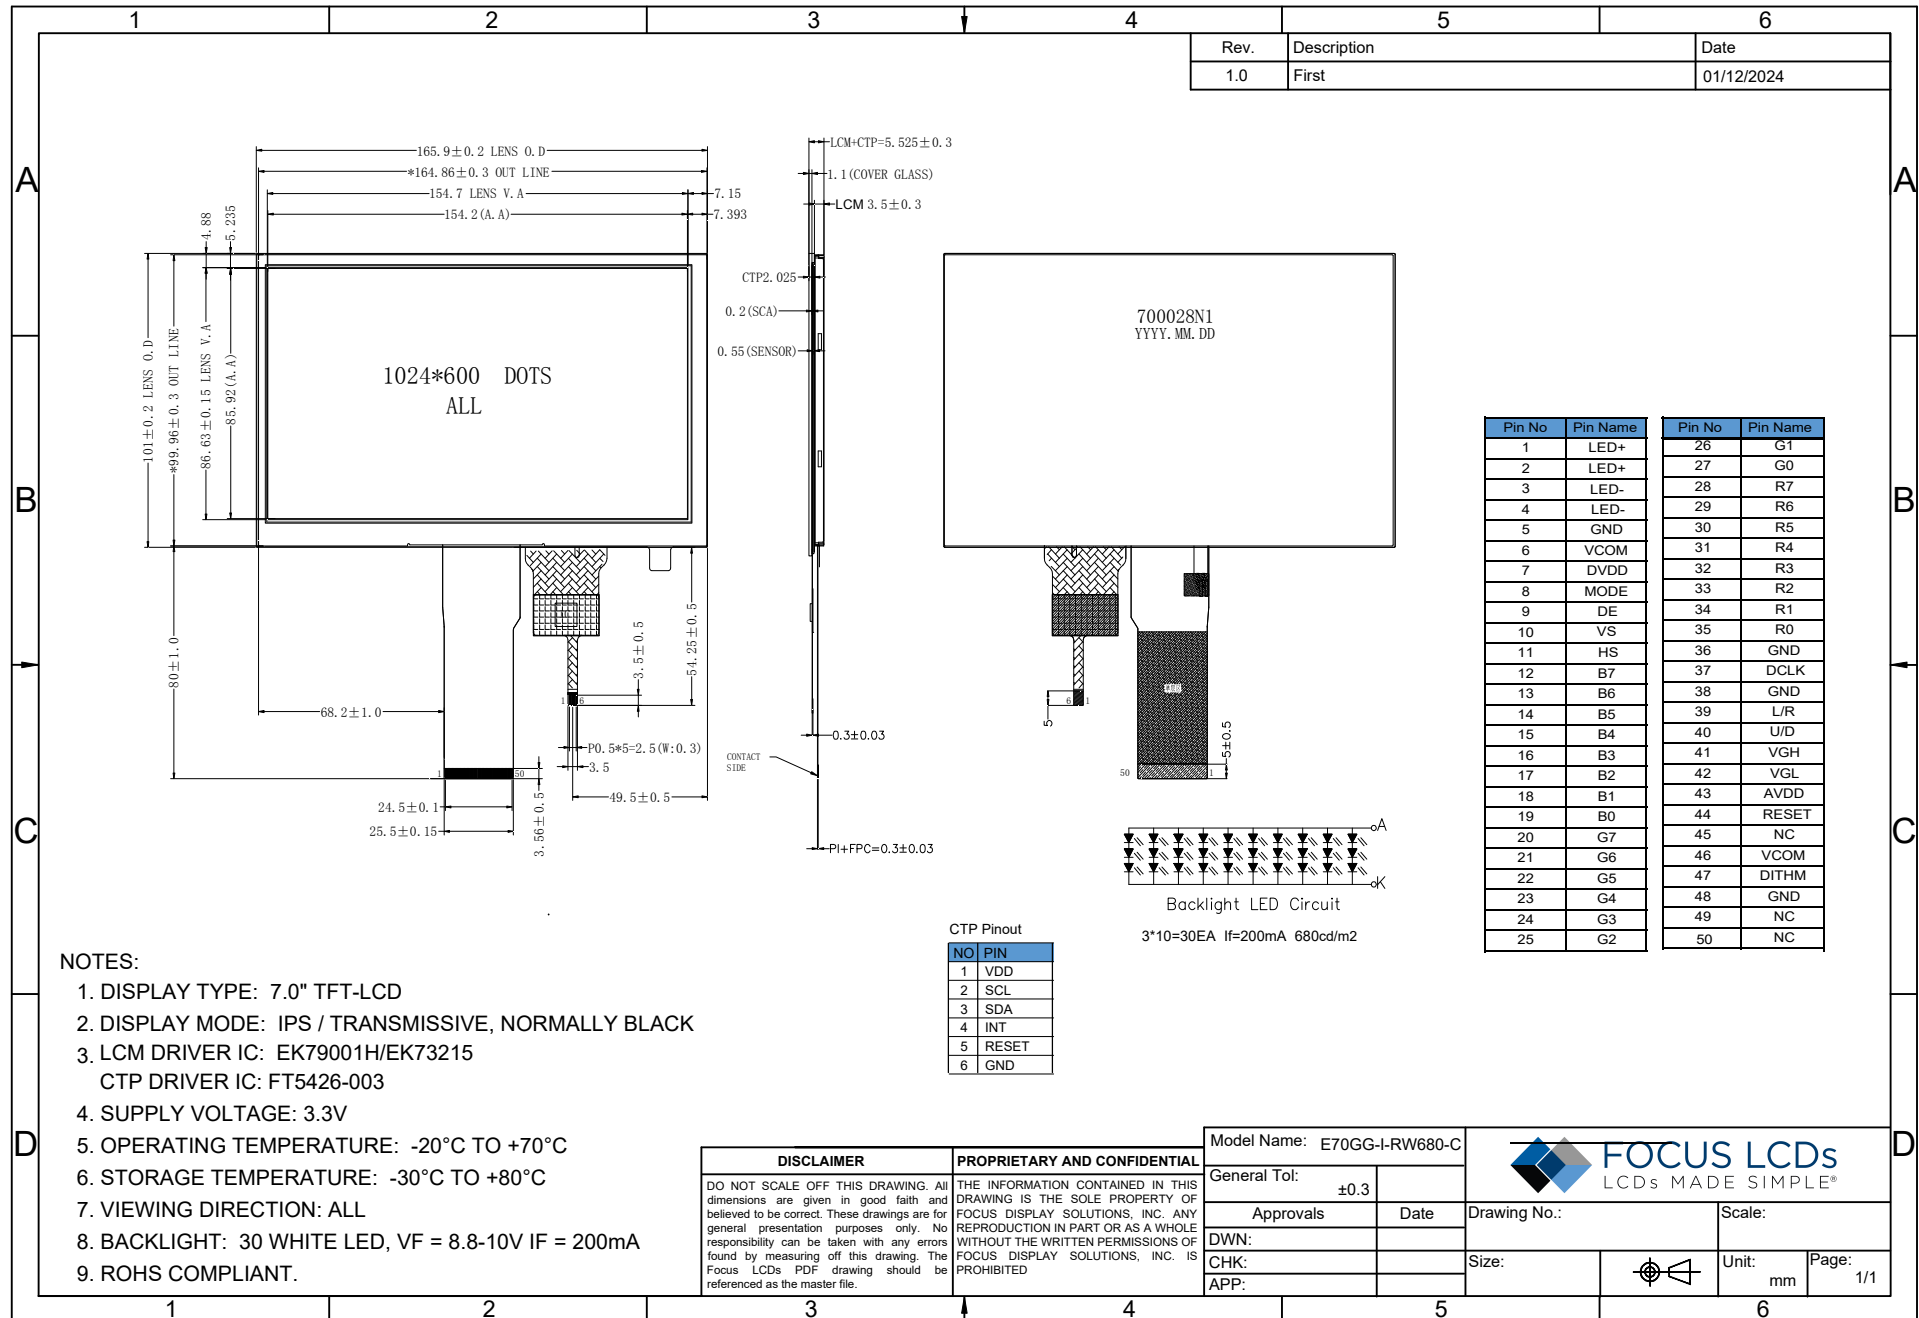

2. Input Terminal Pin Assignment

2.1 TFT Pin Assignment

Recommended TFT Connector: FH12S-50S-0.5SH(55)

NO.	Symbol	Description	I/O
1	LED+	Power supply for LED backlight anode input.	P
2	LED+	Power supply for LED backlight anode input.	P
3	LED-	Power supply for LED backlight cathode input.	P
4	LED-	Power supply for LED backlight cathode input.	P
5	GND	Ground.	P
6	VCOM	Power supply for common voltage.	P
7	DVDD	Digital power.	P
8	MODE	DE/SYNC mode select.	I
9	DE	Data enable signal for RGB interface operation.	I
10	VS	Frame synchronous signal for RGB interface operation.	I
11	HS	Line synchronous signal for RGB interface operation.	I
12-19	B7-B0	Blue data (B0-LSB;B7-MSB).	I
20-27	G7-G0	Green data (G0-LSB; G7-MSB).	I
28-35	R7-R0	Red data (R0-LSB;R7-MSB).	I
36	GND	Ground.	P
37	DCLK	Dot clock signal for RGB interface operation.	I
38	GND	Ground.	P
39	L/R	Source right or left sequence control. Normally pull high.	I
40	U/D	MIPI DSI differential data pair (data lane 3)	I
41	VGH	Power supply for positive power for TFT.	P
42	VGL	Power supply for negative power for TFT.	P
43	AVDD	Power supply for analog circuit.	P
44	RESET	Reset signal input pin.	I
45	NC	No connection.	--
46	VCOM	Power supply for Common voltage.	P
47	DITHB	Dithering function enable control.	I
48	GND	Ground.	P
49	NC	No connection.	--
50	NC	No connection.	--

I: Input, O: Output, P: Power

2.2 CTP Pin Assignment

NO.	Symbol	Description	I/O
1	VDD	Supply Voltage.	P
2	SCL	I2C clock input.	I
3	SDA	I2C data input and output.	I/O
4	INT	External interrupt signal to the host	I
5	RST	External reset, active low	I
6	GND	Ground.	P

3. LCD Optical Characteristics

3.1 Optical Specifications

Item		Symbol	Condition	Min	Typ.	Max	Unit	Note
Contrast Ratio		CR	$\theta=0$ Normal viewing angle	600	800	--	%	(2)
Response Time	Rising	T _R		--	25	40	ms	(4)
	Falling	T _F						
Color Filter Chromaticity	White	W _X		0.230	0.280	0.330		(5)(6)
		W _Y		0.260	0.310	0.360		
Viewing Angle	Hor.	Θ _L	CR≥10	75	80	--	degree	(1)(6)
		Θ _R		75	80	--		
	Ver.	Θ _T		75	80	--		
		Θ _B		75	80	--		
Option View Direction				ALL				(1)


Measuring Conditions:

1. Dark Room
2. Ambient Temperature of $25\pm 2^\circ\text{C}$
3. 15 Minute Warm up

Optical Specification Reference Notes:

(1) Definition of Viewing Angle:

The viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3,9 o'clock direction and the vertical or 6,12 o'clock direction with respect to the optical axis which is normal to the LCD surface.

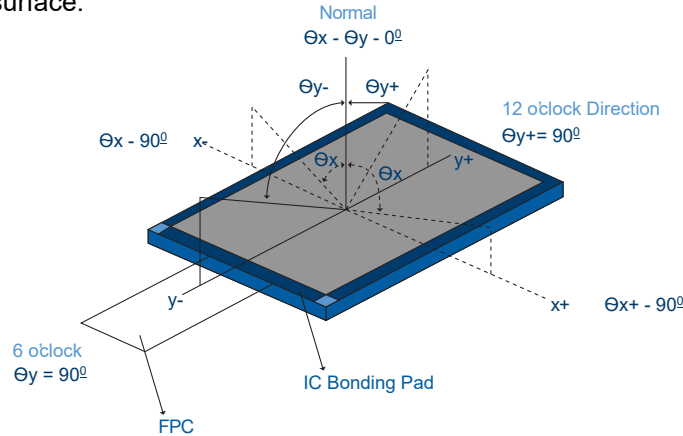

(2) Definition of Contrast Ratio:

Measured at the center point of panel. The contrast ratio (Cr) measured on a module, is the ratio between the luminance (Lw) in a full white area (R=G=B=1) and the luminance (Ld) in a dark area (R=G=B=0).

$$Cr = \frac{Lw}{Ld}$$


(3) Definition of Transmittance (T%):

The transmittance of the panel including the polarizers is measured with electrical driving. The equation for transmittance Tr is:

$$Tr = \frac{It}{Io} \times 100\%$$


Io = the brightness of the light source.

It = the brightness after panel transmission

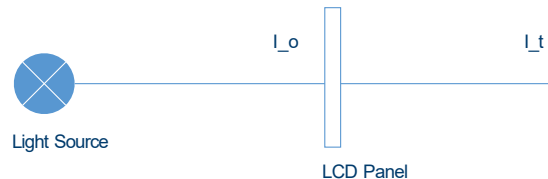

(4) Definition of Response Time (TR, TF):

The rise time 'Tr' is defined as the time for luminance to change from 90% to 10% as a result of a change of the electrical condition. The fall time 'Tf' is defined as the time for luminance to change from 10% to 90% as a result of a change of the electrical condition.

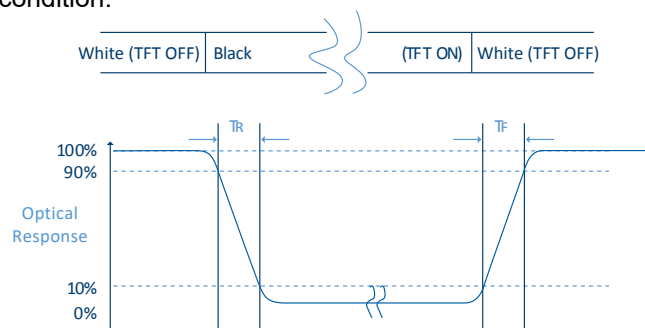

(5) Definition of Color Gamut:

Measuring machine CFT-01. NTSC's Primaries: $R(x,y,Y)$, $G(x,y,Y)$, $B(x,y,Y)$. FPM520 of Westar Display Technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics. The color chromaticity shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.




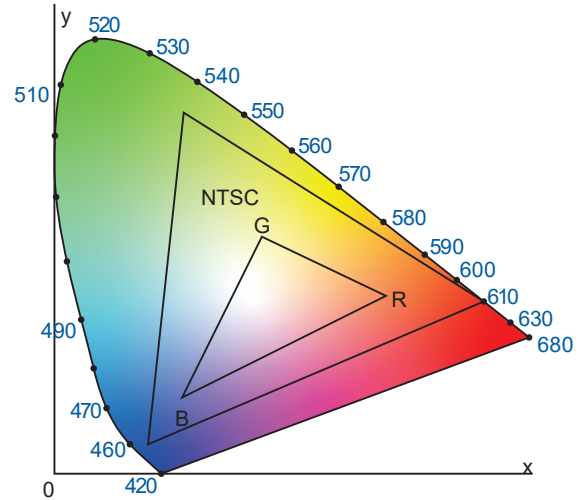


Fig. 1931 CIE Chromaticity Diagram

$$\text{Color Gamut: } S = \frac{\text{Area of RGB Triangle}}{\text{Area of NTSC Triangle}} \times 100\%$$

(6) Definition of Optical Measurement Setup:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 20 minutes.

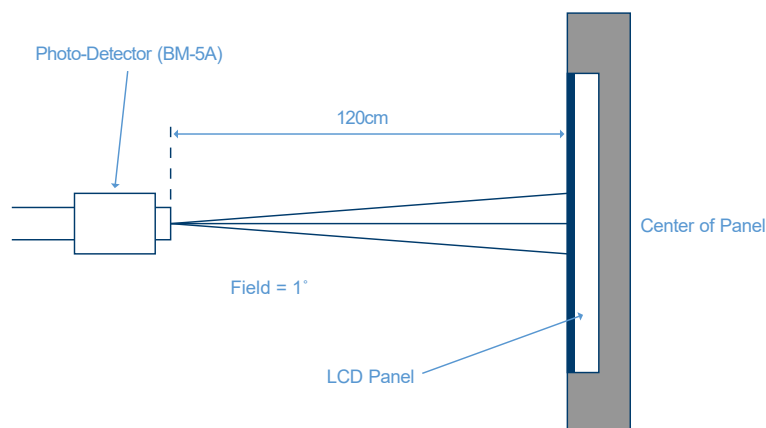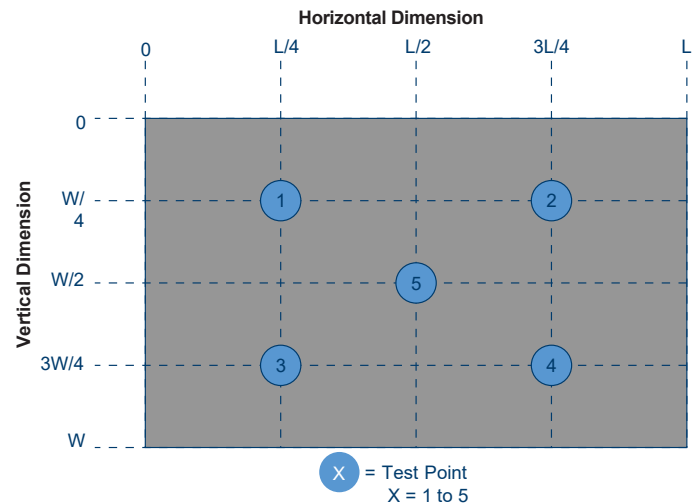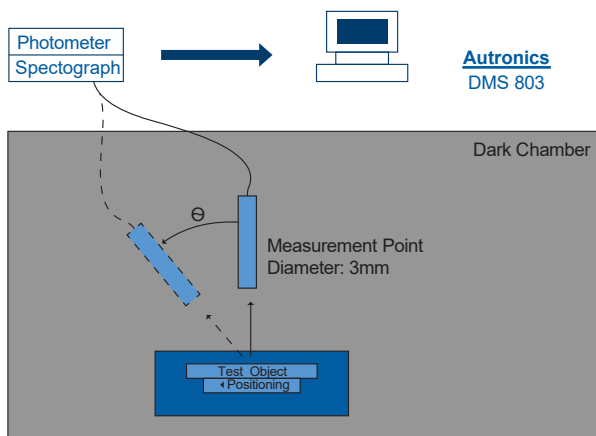

4. TFT Electrical Characteristics

4.1 Absolute Maximum Rating (Ta=25°C, VSS=GND=0V)

Characteristics	Symbol	Min	Max	Unit
Digital Supply Voltage	VDD	-0.3	5	V
Analog Supply Voltage	AVDD	-0.5	15	V
Gate On Voltage	VGH	-0.3	40	V
Gate Off Voltage	VGL	-20	0.3	V
Gate On-Gate Off Voltage	VGH-VGL	12	40	V
Operating Temperature	TOP	-20	+70	°C
Storage Temperature	TST	-30	+80	°C

NOTE: If the absolute maximum rating of the above parameters is exceeded, even momentarily, the quality of the product may be degraded. Absolute maximum ratings specify the values which the product may be physically damaged if exceeded. Be sure to use the product within the range of the absolute maximum ratings.

4.2 Typical Operation Conditions

Characteristics	Symbol	Min	Typ.	Max	Unit	Note
Digital Supply Voltage	VDD	3.0	3.3	3.6	V	--
Gate On Voltage	VGH	17	18	19	V	--
Gate Off Voltage	VGL	-6.6	-6	-5.4	V	--
Analog Supply Voltage	AVDD	9.4	9.6	9.8	V	--
Reference Voltage	VCOM	3.1	3.2	3.3	V	--
Level Output Voltage	V _{IH}	0.7VDD	--	VDD	V	--
	V _{IL}	0	--	0.3*VDD	V	--


4.3 LED Backlight Characteristics

The backlight system is edge lighting type with 30 LED Chips

Item	Symbol	Min	Typ.	Max	Unit	Note
Forward Current	I_F	30	30	--	mA	--
Forward Voltage	V_F	8.4	9.0	10.2	V	--
LCM Luminance	L_V	--	680	--	cd/m ²	(3)
LED Lifetime	H_r	--	50,000	--	hour	(1)(2)
Uniformity	Avg	70	75	--	%	(3)


Note 1: LED lifetime (Hr) can be defined as the time in which it continues to operate under the condition: $T_a=25\pm3^\circ\text{C}$, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note 2: The "LED lifetime" is defined as the module brightness decrease to 50% original brightness at $T_a=25^\circ\text{C}$ and $I_F = 200\text{mA}$. The LED lifetime could be decreased if operating I_F is larger than 200mA. The constant current driving method is suggested.

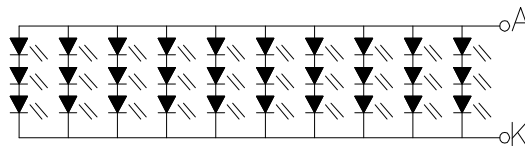

BL CIRCUIT DIAGRAM

Note 3: Luminance Uniformity of these 9 points is defined as below:

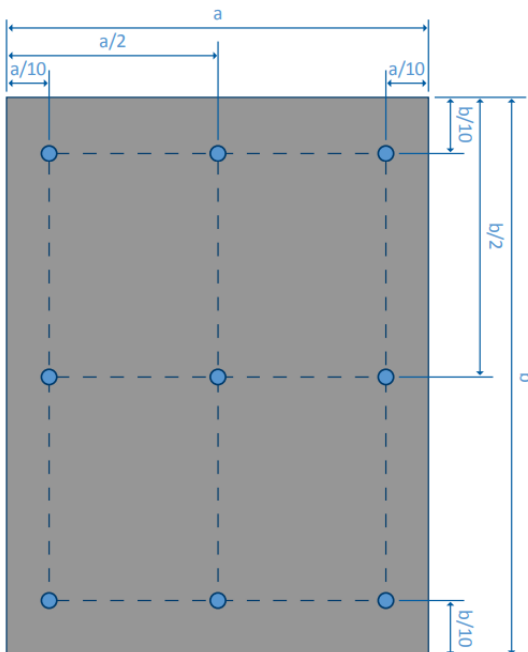

$$\text{Luminance} = \frac{\text{Total Luminance of 9 Points}}{9}$$

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 Points(1-9)}}{\text{Maximum Luminance in 9 Points(1-9)}}$$

5.0 TFT AC Characteristics

5.1 Power-On/Off Timing Sequence

For power-on/off timing sequence diagrams and tables, see table and diagram on page 17 of the data sheet for controller IC EK79001. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/EK79001.pdf>. This can also be found for controller IC EK73215 on page 8. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/EK73215.pdf>

5.2 Signal Timing Characteristics

For signal timing characteristic diagrams and tables, see the first table and diagram page 23 of the data sheet for controller IC EK79001. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/EK79001.pdf>

5.3 Output Timing Table

For output timing diagrams and tables, see page 35 of the data sheet for controller IC EK79001. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/EK79001.pdf>. This can also be found for controller IC EK73215 on page 16. The data sheet can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/EK73215.pdf>

6.4 I2C Timing

For I2C timing diagrams and tables, see page 4 of the data sheet for touch panel IC FT5426-003. The data sheet for FT5426-003 can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/FT5X26.pdf>

6.5 Power-On Timing

For the power on timing diagram, see the first diagram on page 12 of the data sheet for touch panel IC FT5426-003. The data sheet for FT5426-003 can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/FT5X26.pdf>

6.6 Timing for Host Resetting FT5426-003

For the host resetting timing diagram, see the second diagram on page 12 of the data sheet for touch panel IC FT5426-003. The data sheet for FT5426-003 can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/FT5X26.pdf>

6.7 Timing for Setting Slave Address to 0x28/0x29

For this setting slave address timing diagram, see the third diagram on page 9 of the data sheet for touch panel IC FT5426-003. The data sheet for FT5426-003 can be found here: <https://focuslcds.com/wp-content/uploads/Drivers/FT5X26.pdf>

7.0 Quality Inspection Standards

For TFT quality inspection standards, please see the following link: <https://focuslcds.com/tft-quality-inspection-standards/>

8.0 Cautions and Handling Precautions

8.1 Handling and Operating the Module

1. When the module is assembled, it should be attached to the system firmly. Do not warp or twist the module during assembly work.
2. Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
3. Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
4. Do not allow drops of water or chemicals to remain on the display surface. If you have the droplets for a long time, staining and discoloration may occur.
5. If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
6. The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane. Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might cause permanent damage to the polarizer due to chemical reaction.
7. If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
8. Protect the module from static; it may cause damage to the CMOS ICs.
9. Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
10. Do not disassemble the module.
11. Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
12. Pins of I/F connector shall not be touched directly with bare hands.
13. Do not connect, disconnect the module in the "Power ON" condition.
14. Power supply should always be turned on/off by the item Power On Sequence & Power Off Sequence.

8.2 Storage and Transportation

1. Do not leave the panel in high temperature, and high humidity for a long time. It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
2. Do not store the TFT-LCD module in direct sunlight.
3. The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
4. It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module. In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
5. This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.